NEVER USED - SEE 128-4993 FOR AV-3000 OM & IG. 4-97.

RAMPAGE™

BY AUDIOVOX

Stereo System Installation Instructions

CALL TOLL-FREE FOR ANSWERS TO INSTALLATION QUESTIONS: 1-800-645-7102

	TIME ZONE			
DAY	**PACIFIC**	**MOUNTAIN**	**CENTRAL**	**EASTERN**
MON.- FRI.	5:30 AM - 4 PM	6:30 AM - 5 PM	7:30 AM - 6 PM	8:30 AM - 7 PM
SATURDAY	6 AM - 2 PM	7 AM - 3 PM	8 AM - 4 PM	9 AM - 5 PM

Consignes d'Installation des Systèmes Stéréo

APPELEZ LE NUMERO VERT POUR TOUTE QUESTION CONCERNANT L'INSTALLATION

Territoire Continental Des E.U./Canada : 1 - 800 - 225 - 6074
Lundi au Vendredi : 9 H - 19 H Heure de la Côte Est
Samedi : 9 H - 17 H Heure de la Côte Est

Instrucciones para la Instalación de Sistemas Estereofónicos

LLAME SIN CARGO PARA FORMULAR PREGUNTAS SOBRE PROBLEMAS DE INSTALACION

Territorio Continental De EE.UU./Canada :	1 - 800 - 225 - 6074
Lunes a Viernes :	9:00 AM - 7:00 PM Zona Horaria del Este
Sabados :	9:00 AM - 5:00 PM Zona Horaria del Este

Audiovox Corporation, 150 Marcus Blvd., Hauppauge, N.Y. 11788 Form No. 128-4994

INSTALLATION INSTRUCTIONS

This unit is designed for installation in cars, trucks, and vans with an existing radio opening. In many cases, a special installation kit will be required to mount the radio to the dashboard. These kits are available at electronics supply stores and car stereo specialist shops. Always check the kit application before purchasing to make sure the kit works with your vehicle. If you need a kit but cannot find it available, call our toll-free "HELP" line.

UNIVERSAL INSTALLATION (Diagram A)

1. Inspect the Existing Radio Opening
   A. Use the trimplate supplied with the radio to cover the existing dashboard opening. If it completely covers the opening, you can install the radio without an installation kit. If it does not cover the opening, you will need an installation kit.
   B. Check that there will be sufficient space behind the dashboard for the radio chassis.
2. Wire the Radio to the Vehicle's Wiring
   A. In most cases, it is easier to wire the radio before mounting it. Place the radio near the dashboard so the wires can be led through the opening.
   B. Carefully follow the wiring diagram in this manual and make certain all connections are secure and insulated with wire nuts or electrical tape to insure proper operation of the unit.
   C. After completing the wiring, turn the unit on to confirm operation (ignition switch must be "on"). If unit does not operate, re-check all wiring until the problem is corrected. Once proper operation is achieved, turn off unit and ignition switch, and proceed with final mounting of the radio.
3. Mounting the Radio
   A. Thread a shaft nut half-way down each radio shaft.
   B. Place a metal back-up plate on each radio shaft against the shaft nut.
   C. Position the radio behind the dashboard opening so that the back-up plates are snug against the back of the opening. Adjust the shaft nuts behind the back-up plates so that the desired amount of radio nosepiece extends through the opening. The best appearance is usually achieved when there is just enough of the radio extending to be flush with the front of the trimplate.
   D. Place the trimplate over the front of the radio and secure it with a shaft nut on each radio shaft.
   E. Attach one end of the perforated support strap (supplied) to the screw stud on the radio using the hex nut provided. Bend the strap to position it as necessary.

CAUTION: The rear of the radio must be supported with the strap to prevent damage to the dashboard from the weight of the radio or improper operation due to vibration.

   F. Install knobs on the radio.

INSTALLATION USING KITS (Diagram B)

Use these instructions if your vehicle requires the use of an installation kit to mount this radio.

1. Follow the instructions included with the installation kit to attach the radio to the mounting plate supplied with the kit.
2. Wire and test the radio as described in section 2 above.
3. Install the radio/mounting plate assembly to the sub-dashboard according to the instructions of the installation kit.
4. Attach the support strap to the radio and dashboard as described in section 3-E above.
5. Replace the dashboard trimpanel and install knobs on the radio shafts.

HELP!

1-800-645-7102

Monday-Friday 8:30am-7:00pm Eastern
Saturday 9:00am-5:00pm Eastern

UNIVERSAL INSTALLATION
Diagram A

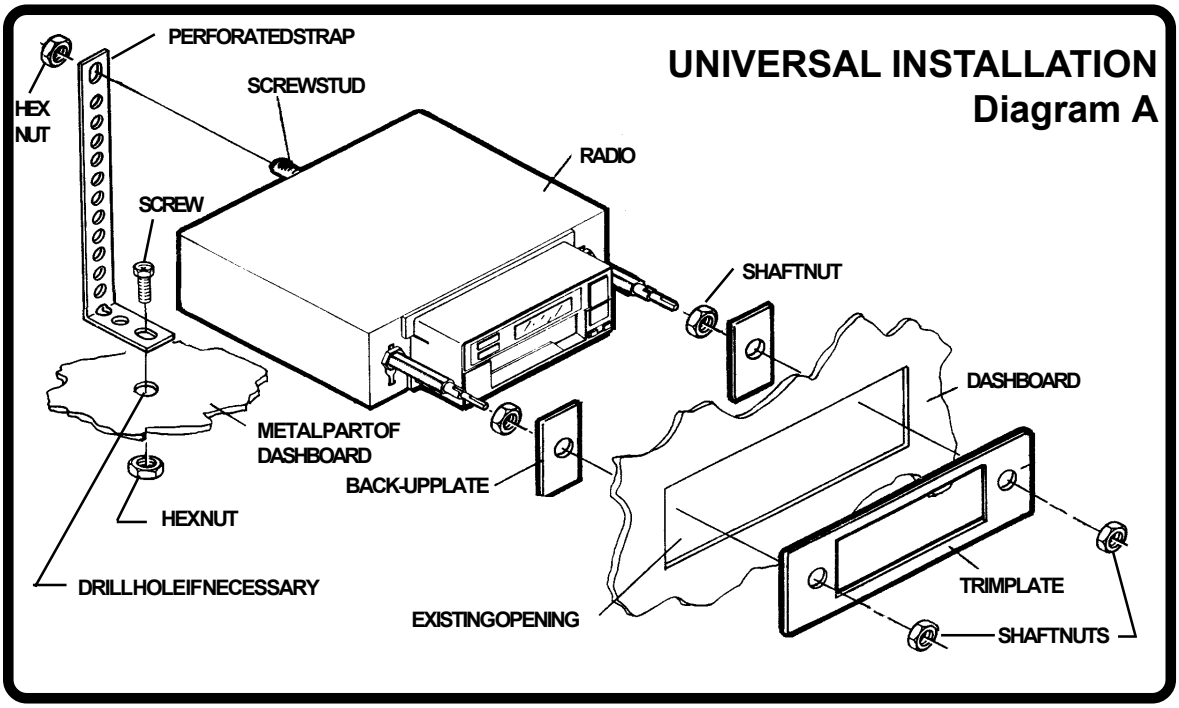

INSTALLATION USING KITS (typical)
Diagram B

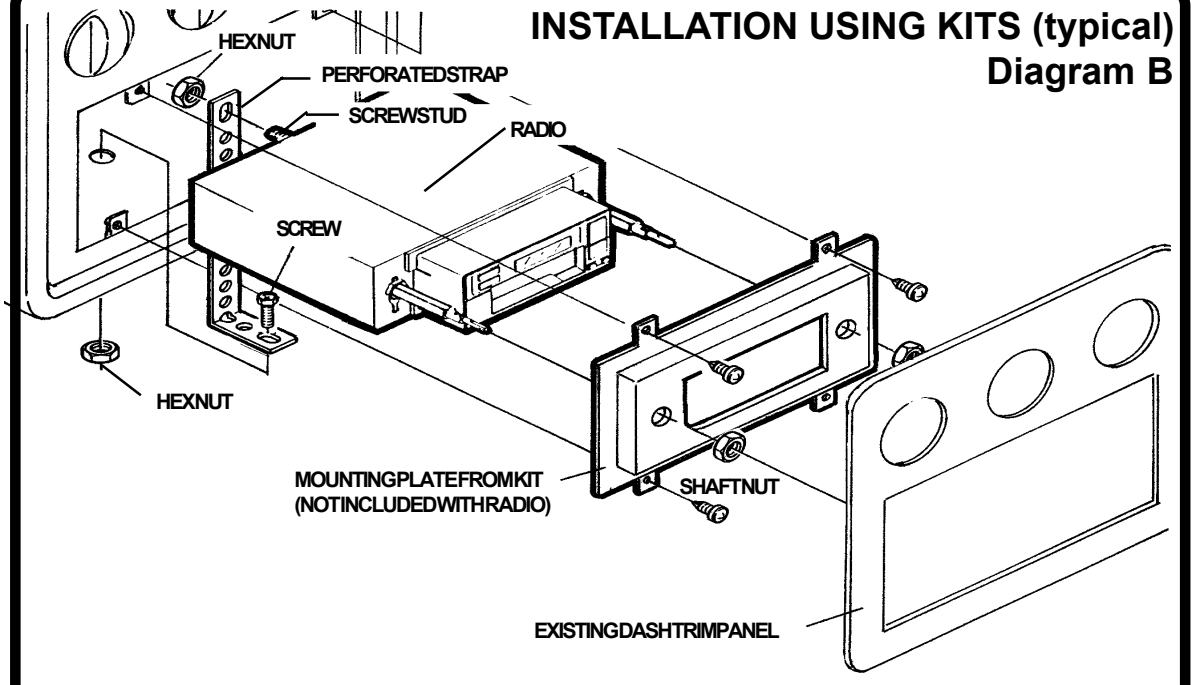

WIRING DIAGRAM

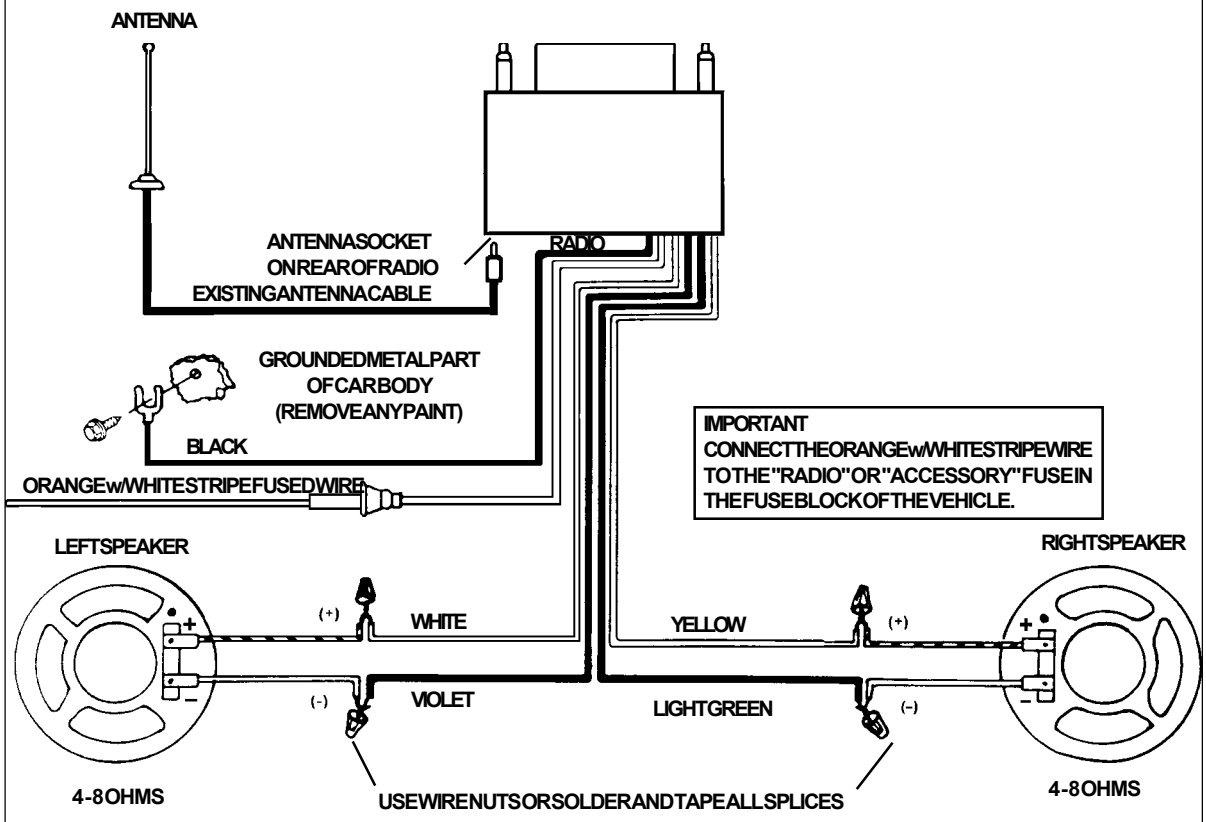

CAUTION !

THE AMPLIFIERS IN THIS RADIO ARE *ONLY* DESIGNED FOR USE WITH 4 SPEAKERS.

NEVER **COMBINE (BRIDGE) OUTPUTS FOR USE WITH 2 SPEAKERS.**

NEVER **GROUND NEGATIVE SPEAKER LEADS TO CHASSIS GROUND.**

FAILURE TO WIRE CORRECTLY MAY CAUSE DAMAGE TO THE RADIO.

4 SPEAKER SYSTEM WIRING

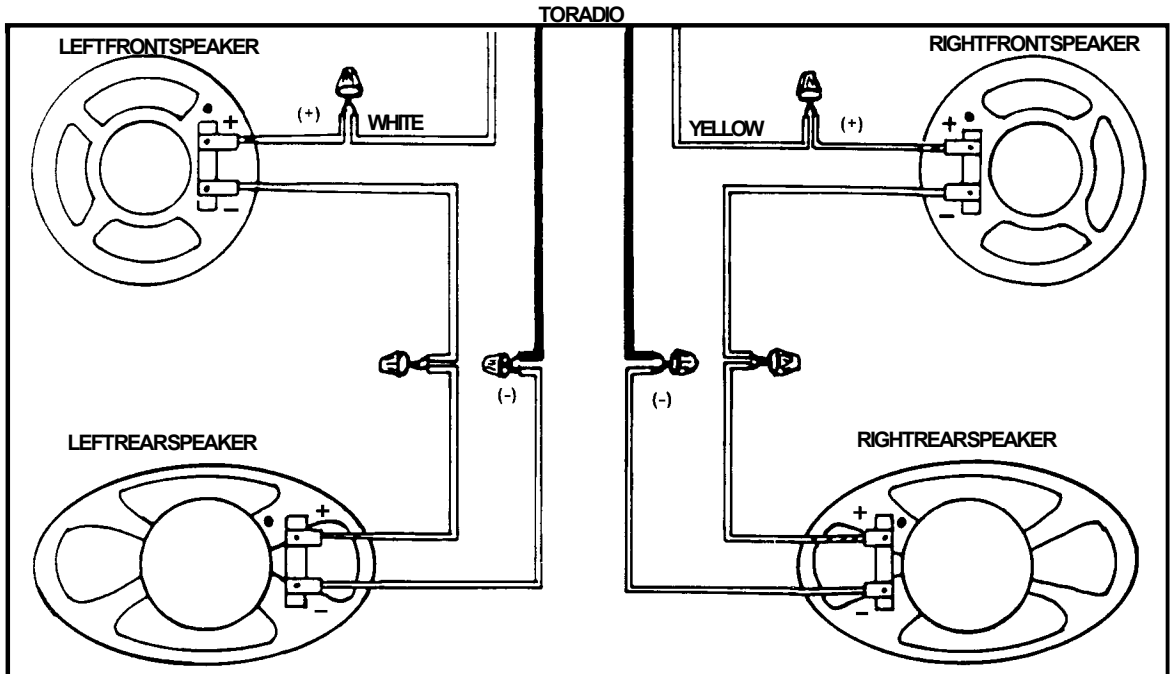

NOTE: CONNECT ALL OTHER WIRES AS SHOWN ON PAGE 3.

4 SPEAKER SYSTEM WIRING

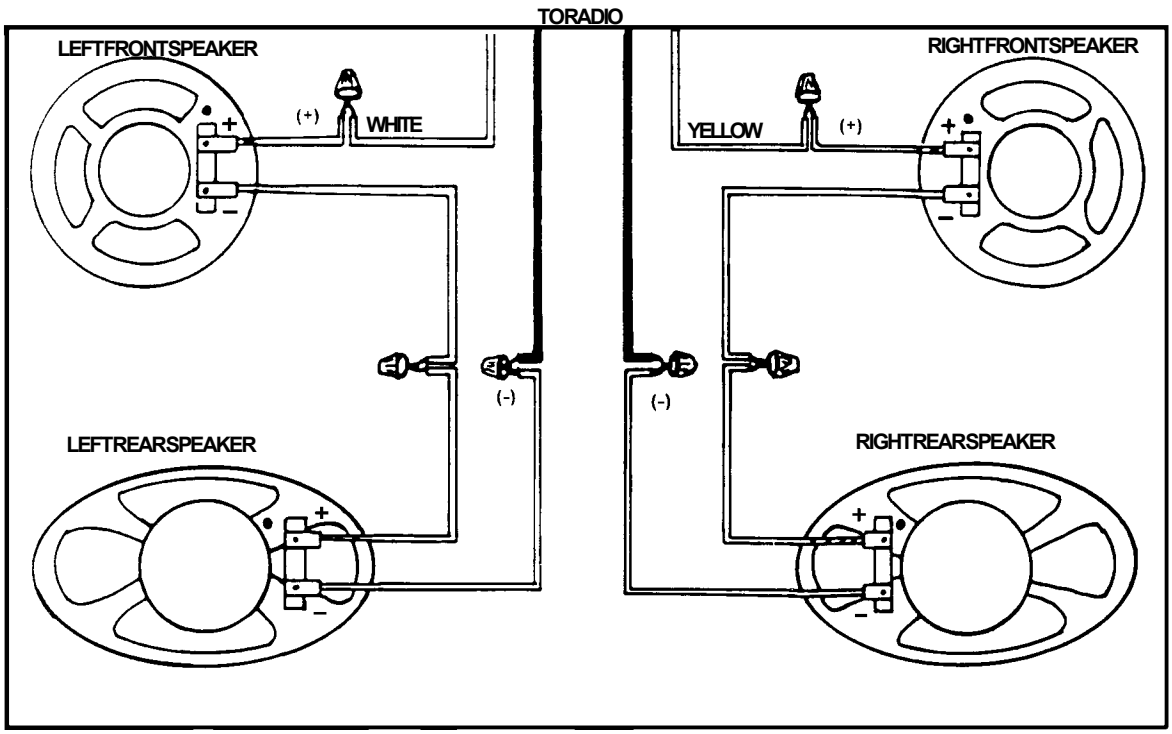

NOTE: CONNECT ALL OTHER WIRES AS SHOWN ON PAGE 3.